E.D

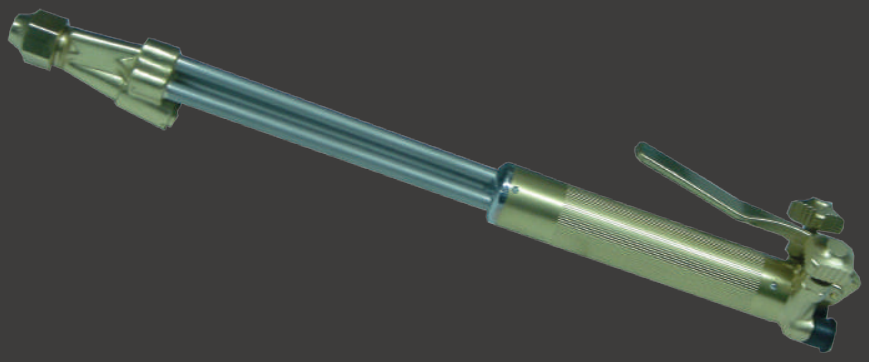

FLAME

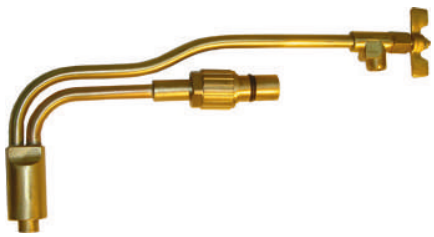

L781DG	GL CUTTING ATTACHMENT ACETYLENE BUTTERFLY GL cutting attachment. Acetylene butterfly. Use with Gl type nozzles.

L781EG	GL HANDLE UNIVERSAL MOD.GL GL handle. Universal Mod. GA. European passage 1/4 G, 3/8 G l

L7422E	EXTERNAL CUTTING NOZZLE GL Nº1 2 10
L7423E	EXTERNAL CUTTING NOZZLE GL Nº2 10 25
L7424E	EXTERNAL CUTTING NOZZLE GL Nº3 25/30 30/50 50/100
L7425E	EXTERNAL CUTTING NOZZLE GL Nº4 100/100 150/200 200/300

L7422	INTERNAL CUTTING NOZZLE GL Nº1 2/10
L7423	INTERNAL CUTTING NOZZLE GL Nº2 10/25
L7424	INTERNAL CUTTING NOZZLE GL Nº3 25/30
L7425	INTERNAL CUTTING NOZZLE GL Nº4 30/50

L781623P	BLOWTORCH MX KT62 PROP.LG.460 CAB.90º USA THREAD

Oxy-propane blowtorch MX KT 62
Length 460mm long
Head body 90º
USA thread 9/16l – 9/16D
Maximum cutting capacity 300mm

L771623A	BLOWTORCH OXYGEN/ACETYLENE TREX 7 62 470 90º EURO THREAD

Soplete Oxi-acetileno Ergodani modelo TREX 7 62
Longitud 470mm largo
Cuerpo cabeza 90º
Rosca Euro 3/8l - 1/4D
Capacidad de corte maxima 300mm

L7621NX	CUTTING NOZZLE H 62 EUROP. 1NX 15 25 MM. PROPANE
L76230NXB	CUTTING NOZZLE H 62 EUROP. 0 5 MM.3/ONX PROPANE
L76200NXB	CUTTING NOZZLE H 62 EUROP. 00NX 5 10 MM. PROPANE
L7620NX	CUTTING NOZZLE H 62 EUROP. 0NX 10 15 MM. PROPANE
L7622NX	CUTTING NOZZLE H 62 EUROP. 2NX 25 50 MM. PROPANE
L7623NX	CUTTING NOZZLE H 62 EUROP. 3NX 50 75 MM. PROPANE
L7624NX	CUTTING NOZZLE H 62 EUROP. 4NX 75 150 MM. PROPANE
L7625NX	CUTTING NOZZLE H 62 EUROP. 5NX 150 200 MM. PROPANE
L7626NX	CUTTING NOZZLE H 62 EUROP. 6NX 200 300 MM. PROPANE

L76200ACB	CUTTING NOZZLE H 62 EUROP. 00AC 5 10 MM. ACETYLENE
L7620AC	CUTTING NOZZLE H 62 EUROP. 0AC 10 15 MM. ACETYLENE
L7621AC	CUTTING NOZZLE H 62 EUROP. 1AC 15 25 MM. ACETYLENE
L7622AC	CUTTING NOZZLE H 62 EUROP. 2AC 25 50 MM. ACETYLENE
L7623AC	CUTTING NOZZLE H 62 EUROP. 3AC 50 100 MM. ACETYLENE
L7624AC	CUTTING NOZZLE H 62 EUROP. 4AC 100 175 MM. ACETYLENE
L7625AC	CUTTING NOZZLE H 62 EUROP. 5AC 175 250 MM. ACETYLENE

L78614	ANTI-RETURN VALVE.MX EURO SBLOWTORCH.1/4 D GAS FLAME OXYGEN Anti-return oxygen valve MX Euro blowtorch 1/4 G right (gas and flame) Maximum oxygen flow 119 m3/h

L78638I	ANTI-RETURN VALVE.MX EURO BLOWTORCH 3/8 I GAS FLAME ACET/PROP Anti-return gas valve MX Euro blowtorch 3/8 G left (gas and flame) Maximum acetylene flow 9m3/h Maximum fuel gases flow 82m3/h

L786916DS	ANTI-RETURN VALVE.US.MX BLOWTORCH 9/16 D FLAME OXYGEN Anti-return oxygen valve MX USA blowtorch 9/16 right (gas and flame) Maximum oxygen flow 119m3/h

L786916IS	ANTI-RETURN VALVE.US.MX BLOWTORCH 9/16 I GAS FLAME ACET/PRO Anti-return gas valve MX USA blowtorch 9/16 left (gas and flame) Maximum acetylene flow 9 m3/h Maximum fuel gases flow 82 m3/h

L70389	SERIAL HOSE MA BITUBE OXYGEN/ACETYLENE 8*9 BY MTS. Bitube hose serial MK Oxygen Acetylene of 8 x 9 mm. (By Mts.)

4CAPR	ERGODANI PROPANE PRESSURE REDUCER SERIAL DIN 4,0 BAR Ergodani propane pressure reducer serial Din 4,0 bar Exit 4 bar With user key

4CAOX	ERGODANI OXYGEN PRESSURE REDUCER SERIAL DIN 10 BAR Ergodani oxygen pressure reducer serial Din 10 bar Entrance 200 Exit 10 bar With user key

4CAAC	ERGODANI ACETYLENE PRESSURE REDUCER SERIAL DIN 1,5 BAR Ergodani acetylene pressure reducer serial Din 1,5 bar Entrance 40 exit 1,5 bar With user key

ERGODANI
Welding Technology Division